

RADICI

Lounge

Collection


Oslo




246544



246546

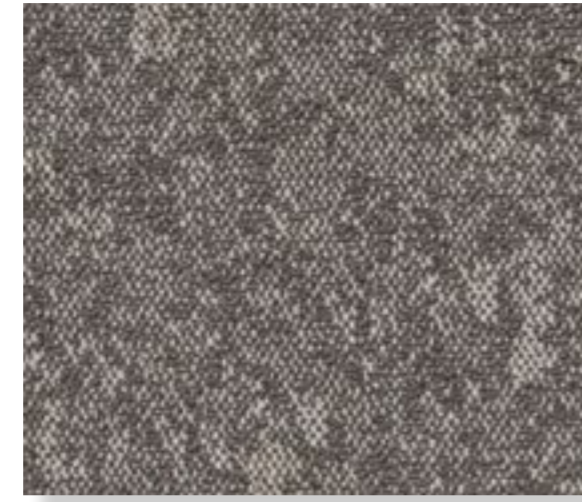

246547

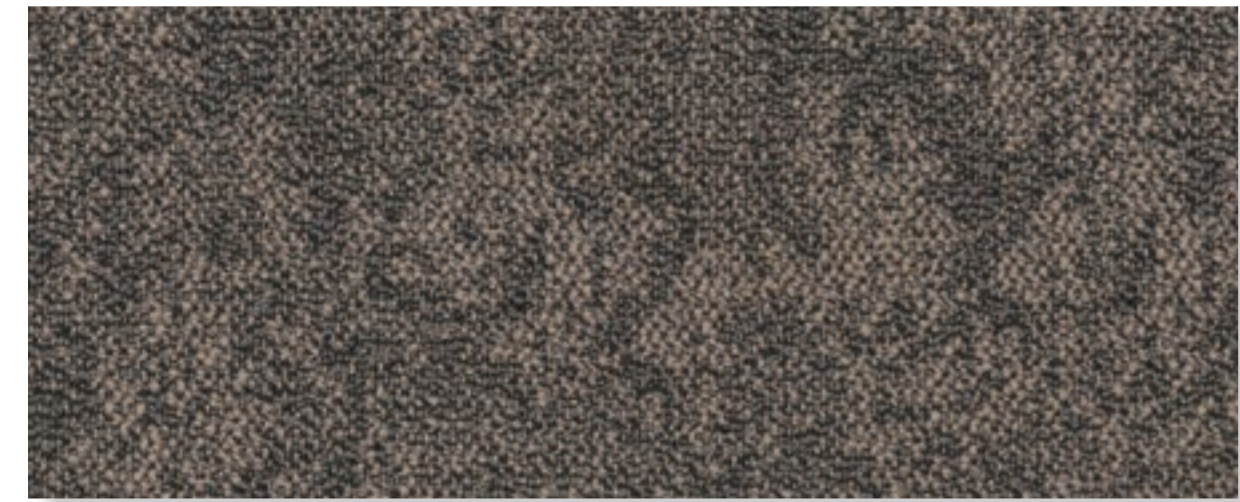

246549



246545



246576



246575



246574



246558



246577



246578

Berlin



196170




196190



196173




246051

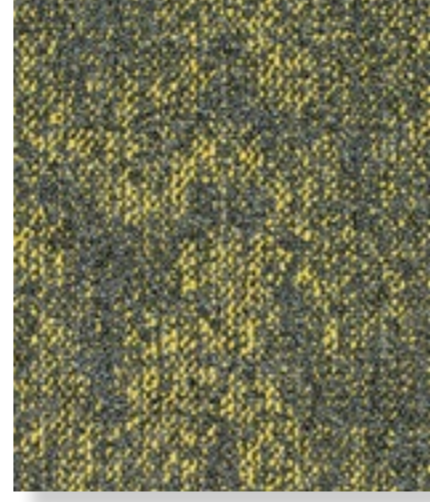

246151




246020

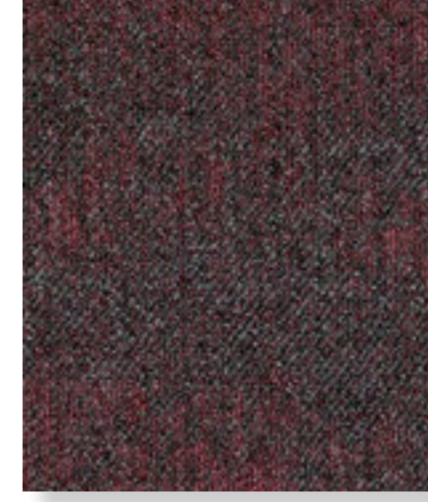

246120



246042

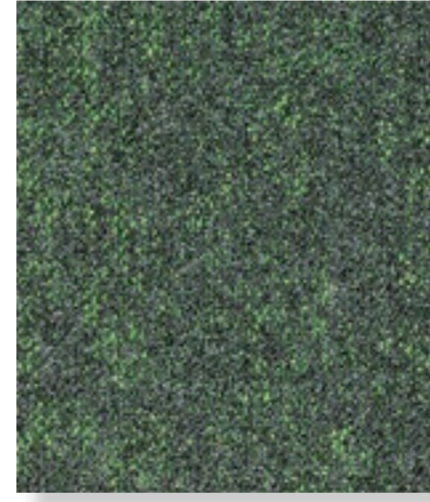

246142



196180



196183




196174



196178



196176

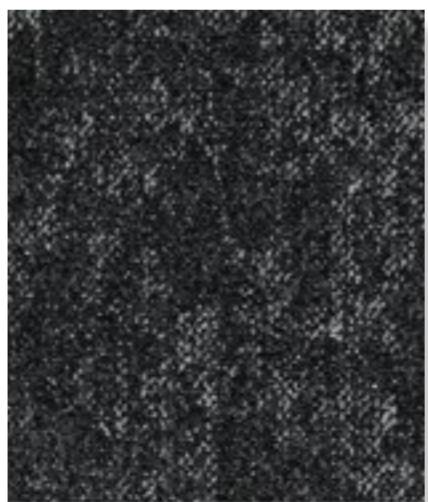

196177


Budapest




243647




243555

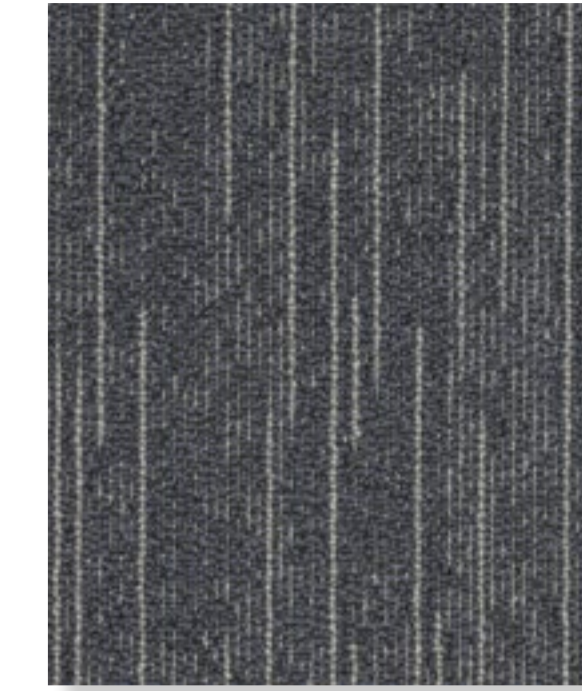

243556

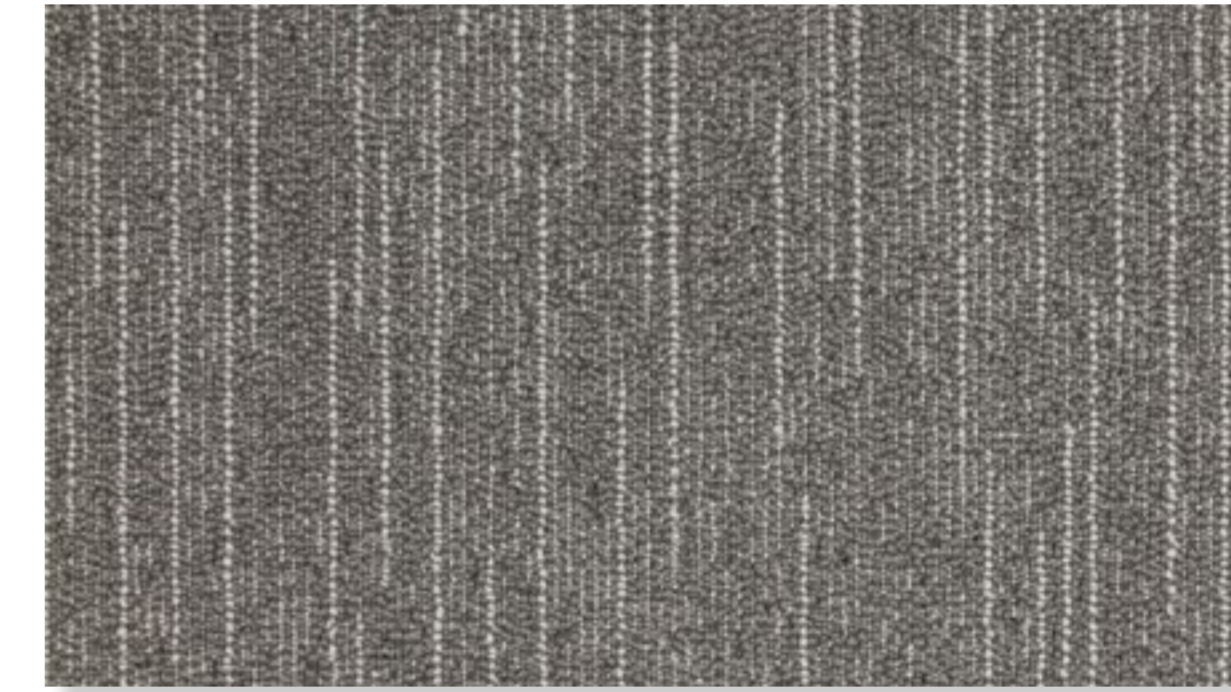


243575

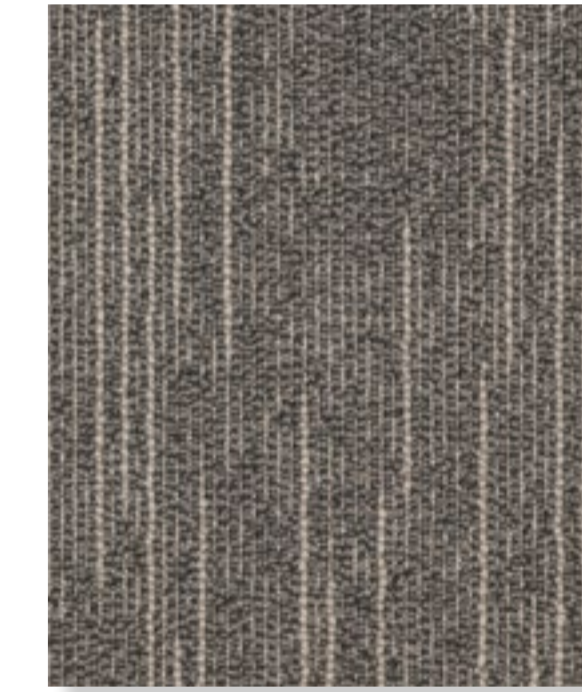

243547



243573

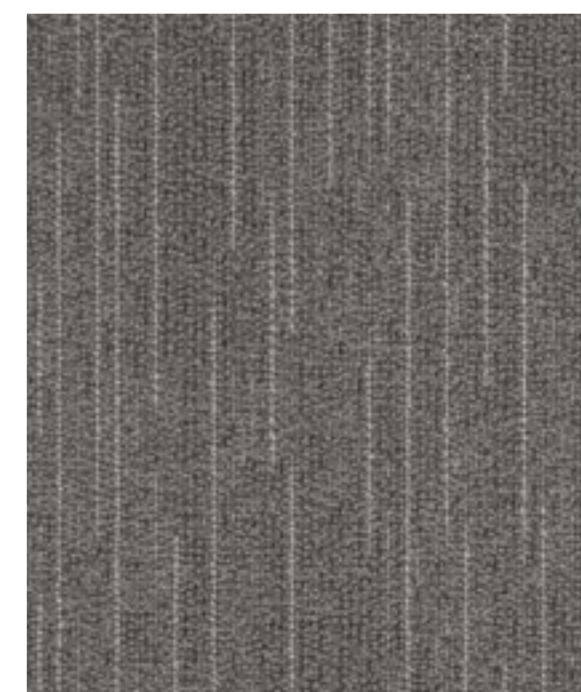


243677



243578


Madrid

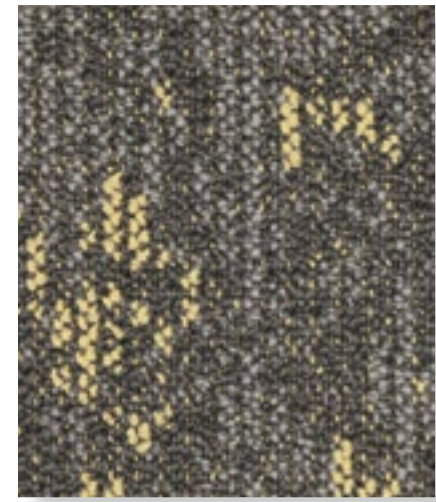


249673




249633

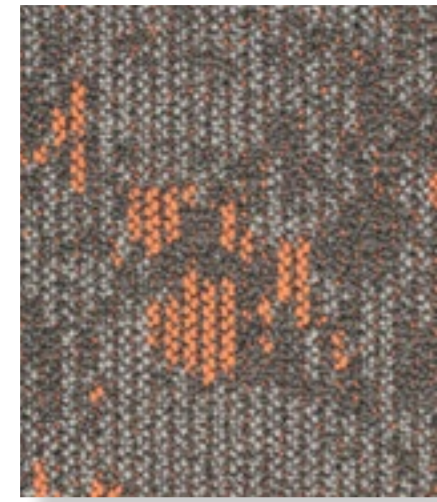

249671

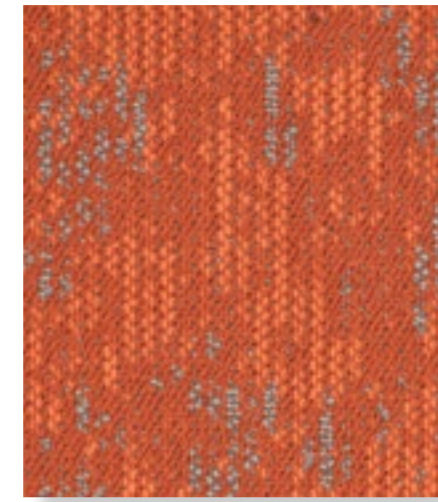


249622

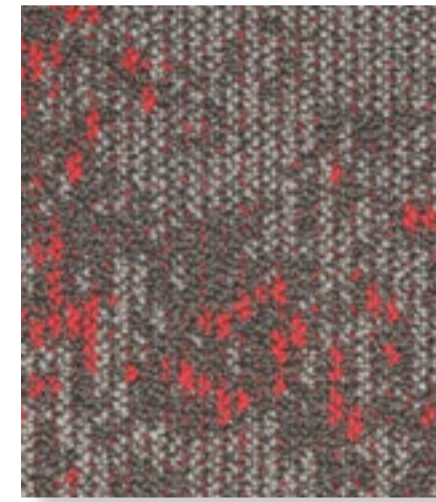

249672




249625

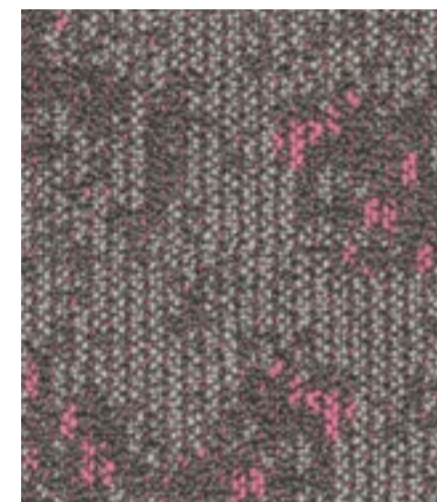


249678




249685

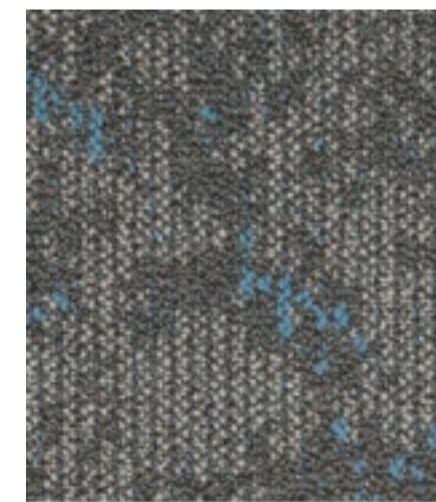

249677

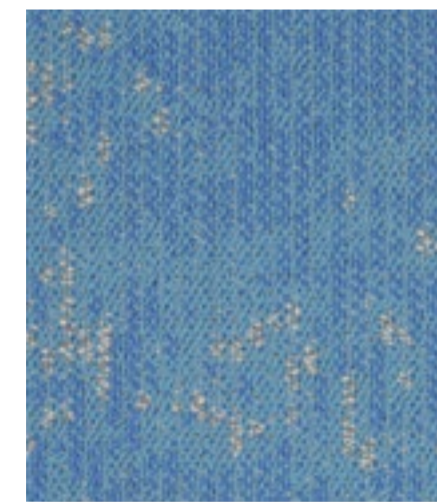


249655

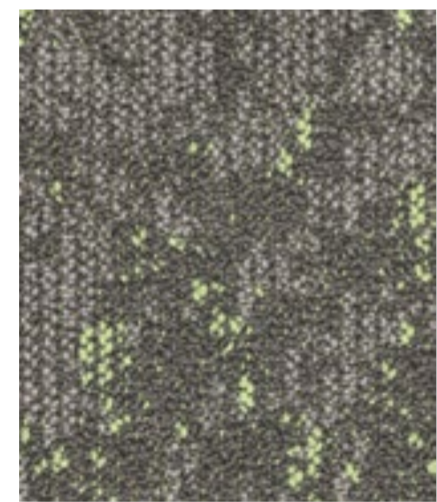

249676



249665

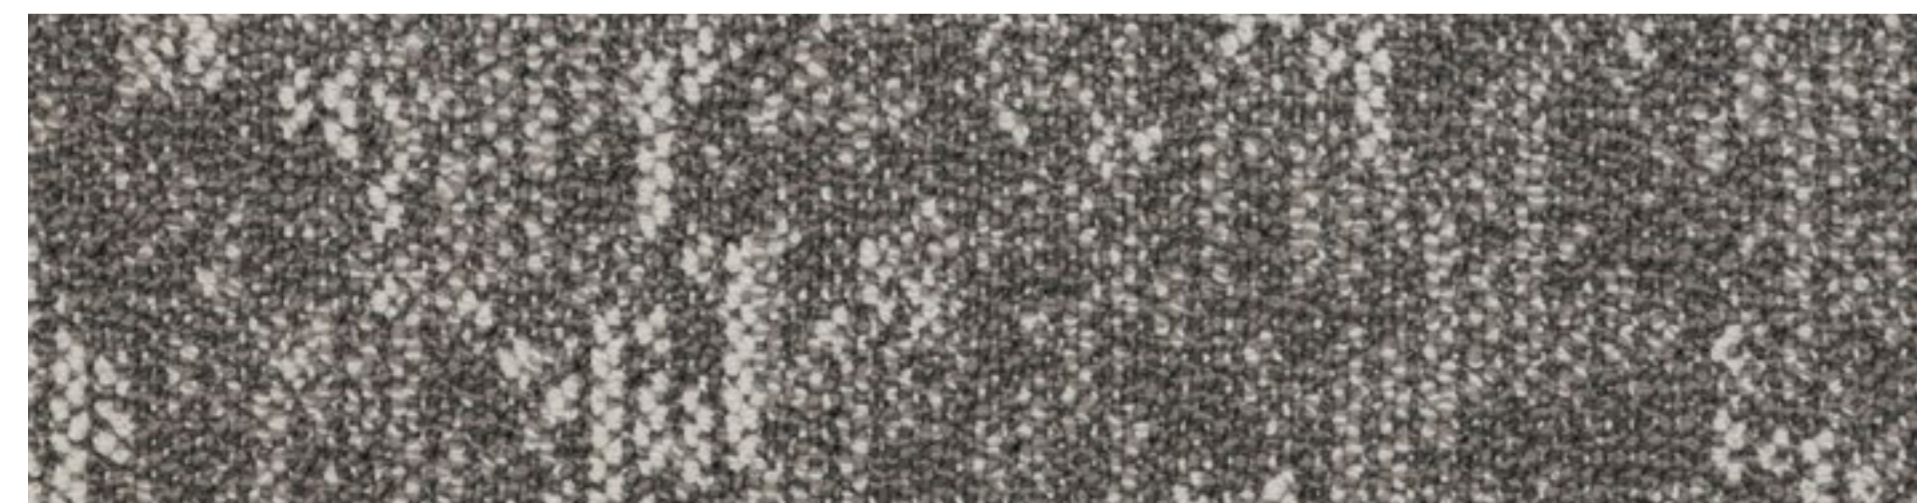

249675


Lisboa




196672



246696

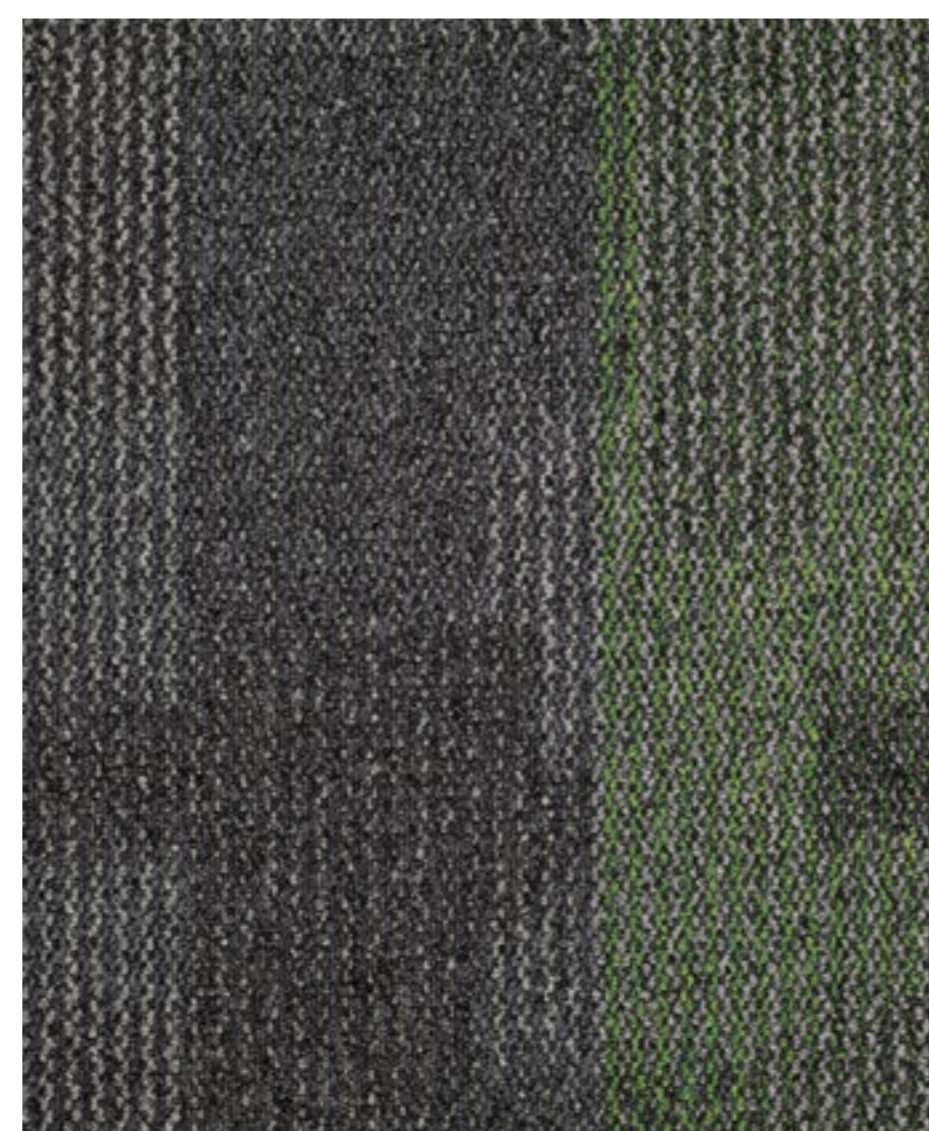

246641

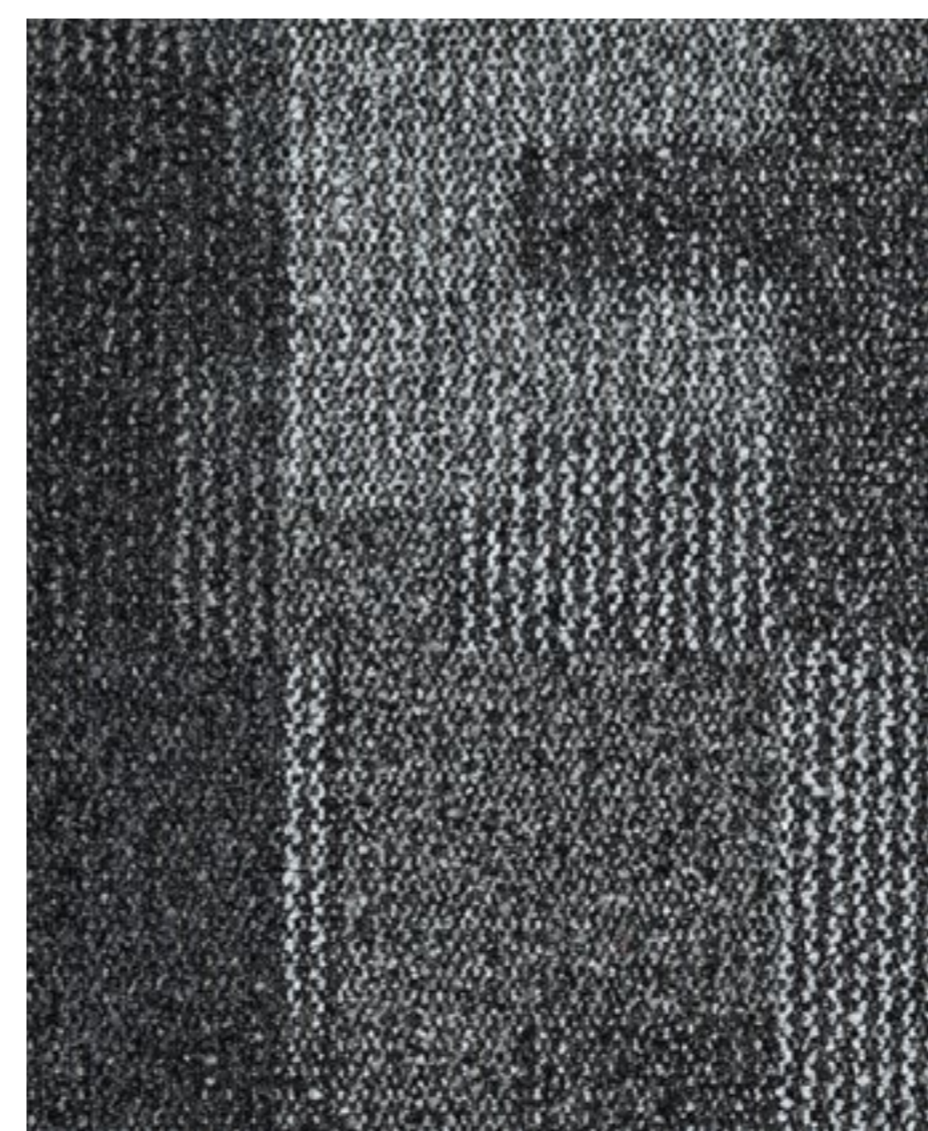

196678

Barcelona



246251



196270



196290



196273



246151



246220



246120



246242




246142




196280




196283

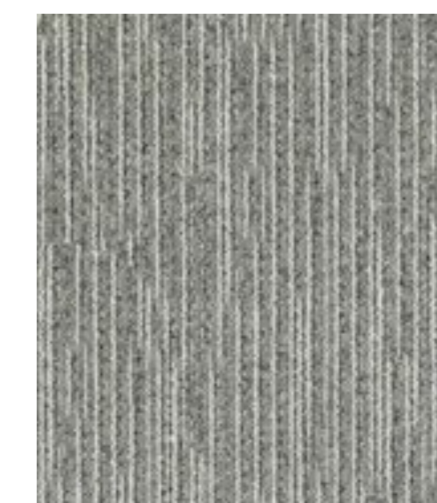

196274

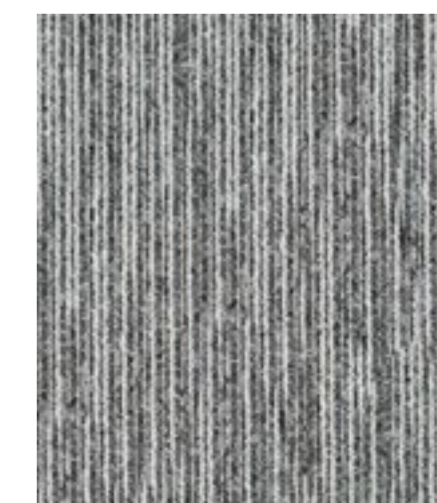

196278

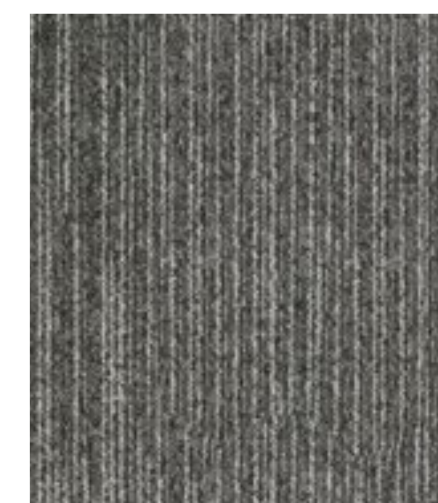

196276



196277

Oslo



CONSTRUCTION
Tufted Loop Pile –Scroll 1/10”

COMPOSITION
100% Polyamide SD

SECONDARY BACKING
POLYFLEX

STITCHES PER M²
± 208820

PILE HEIGHT ± 2.5 mm

TOTAL HEIGHT ± 5.4 mm

YARN WEIGHT ± 550 g/m²

TOTAL WEIGHT ± 4000 g/m²

TILE SIZE 50x50 cm



COLOUR FASTNESS TO LIGHT 5
INSULATION IMPACT NOISE ΔL_w 24 db
THERMAL RESISTANCE m² K/W ≤ 0,17
BODY VOLTAGE WALKING TEST K/W ≤ 2

Budapest



CONSTRUCTION
Tufted Loop Pile –Scroll 1/10”

COMPOSITION
100% Polyamide SD

SECONDARY BACKING
POLYFLEX

STITCHES PER M²
± 205400

PILE HEIGHT ± 2.9 mm

TOTAL HEIGHT ± 5.5 mm

YARN WEIGHT ± 550 g/m²

TOTAL WEIGHT ± 400 g/m²

TILE SIZE 50x50 cm



COLOUR FASTNESS TO LIGHT > 5
INSULATION IMPACT NOISE ΔL_w 20 db
THERMAL RESISTANCE m² K/W ≤ 0,17
BODY VOLTAGE WALKING TEST K/W ≤ 2

Madrid



CONSTRUCTION
Tufted Loop Pile –Scroll 1/10”

COMPOSITION
100% Polyamide SD

SECONDARY BACKING
POLYFLEX

STITCHES PER M²
± 213300

PILE HEIGHT ± 2.9 mm

TOTAL HEIGHT ± 6.2 mm

YARN WEIGHT ± 650 g/m²

TOTAL WEIGHT ± 4200 g/m²

TILE SIZE 50x50 cm



COLOUR FASTNESS TO LIGHT > 5
INSULATION IMPACT NOISE ΔL_w 24 db
THERMAL RESISTANCE m² K/W ≤ 0,17
BODY VOLTAGE WALKING TEST K/W ≤ 2

Lisboa



CONSTRUCTION
Tufted Loop Pile 1/10”

COMPOSITION
100% Polyamide SD

SECONDARY BACKING
POLYFLEX

STITCHES PER M²
± 189600

PILE HEIGHT ± 3.0 mm

TOTAL HEIGHT ± 5.6 mm

YARN WEIGHT ± 740 g/m²

TOTAL WEIGHT ± 4200 g/m²

TILE SIZE 50x50 cm



COLOUR FASTNESS TO LIGHT > 5
INSULATION IMPACT NOISE ΔL_w 24 db
THERMAL RESISTANCE m² K/W ≤ 0,17
BODY VOLTAGE WALKING TEST K/W ≤ 2

Berlin



CONSTRUCTION
Tufted Loop Pile 1/10”

COMPOSITION
100% Polyamide SD

SECONDARY BACKING
POLYFLEX

STITCHES PER M²
± 189600

PILE HEIGHT ± 3.0 mm

TOTAL HEIGHT ± 5.6 mm

YARN WEIGHT ± 740 g/m²

TOTAL WEIGHT ± 4200 g/m²

TILE SIZE 50x50 cm



COLOUR FASTNESS TO LIGHT > 5
INSULATION IMPACT NOISE ΔL_w 24 db
THERMAL RESISTANCE m² K/W ≤ 0,17
BODY VOLTAGE WALKING TEST K/W ≤ 2

Special Sizes Available (Felt backing option available):

For a minimum of 500 SQM:

48×48 cm
60×60 cm
60.96×60.96 cm

For a minimum of 100 SQM:

100×100 cm

For a minimum of 200 SQM:

100×50 cm
100×25 cm
25×100 cm
100×200 cm
100×150 cm

Please consider a 2% production coverage.

Barcelona



CONSTRUCTION
Tufted Loop Pile 1/10”

COMPOSITION
100% Polyamide SD

SECONDARY BACKING
POLYFLEX

STITCHES PER M²
± 189600

PILE HEIGHT ± 3.0 mm

TOTAL HEIGHT ± 5.6 mm

YARN WEIGHT ± 740 g/m²

TOTAL WEIGHT ± 4200 g/m²

TILE SIZE 50x50 cm



COLOUR FASTNESS TO LIGHT > 5
INSULATION IMPACT NOISE ΔL_w 24 db
THERMAL RESISTANCE m² K/W ≤ 0,17
BODY VOLTAGE WALKING TEST K/W ≤ 2

Special Sizes Available (Felt backing option available):

For a minimum of 500 SQM:

48×48 cm
60×60 cm
60.96×60.96 cm

For a minimum of 100 SQM:

100×100 cm

For a minimum of 200 SQM:

100×50 cm
100×25 cm
25×100 cm
100×200 cm
100×150 cm

Please consider a 2% production coverage.